




EDS 10

STÖCKLIN – YOUR ADVANTAGES

Compact and easy to handle

- **Higher productivity**
- **Ideal handling**
- **High degree of flexibility**

Modern electronic control

- **A.C. drive motor with CAN BUS technology** 
- **Safe handling even on slopes**
- **Smooth transport of materials and reduced vehicle wear**
- **Optimum response at all times**
- **Power saving**
- **Emergency driving system**

Sturdy Swiss Quality

- **Best quality and long service life**
- **High serviceability**
- **Best value for money**
- **Reasonable spare part prices**

ERGONOMICS AND SAFETY

The laterally mounted steering handle provides for unobstructed visibility when picking and positioning loads. The ergonomically designed tiller allows for a precise handling even with working gloves.

The big-sized proportional buttons allow a precise control of the movements. Handling in narrow spaces even with vertical steering handle due to the additional bridging switch.

STRUCTURE AND EQUIPMENT

Developed from a new complex modular system with multiple use of standard components. Very rugged despite its compact design. There are various specially designed fork-lift frames available. EMERGENCY STOP button, combined working hours meter, battery controller with error code indicator. Built-in charger 30A/230V. Battery 24V – 160 Ah.

Options:

- Other battery sizes
- Protective grid
- Client-specific load parts
- Available in cold store version

DRIVE

Maintenance-free, smooth-running three-phase AC motor with high torque at lowest speed.

Charging during electronic brake application. The lateral drive and the lateral support roller guarantees optimum stability in materials handling. All wheels (load rollers inclusive) made of durable Vulkollan.

ELECTRONIC SYSTEM

User-programmable microprocessor controller. COMBINED drive and lift control. The AC travel drive and the variable-speed DC hoisting motor are energy-saving. CAN BUS technology with best screening. The LOS (Limited Operating Strategy) system allows limited travel motion in case of failures that cause a standstill. The operational response and other parameters can be easily adapted to the customer's individual requirements by means of a manual programming device.

DIMENSIONS



Constructed using the latest in 3D computer aided design, it is extremely compact.

What it lacks in size is made up for in serviceability. The removable protective cover facilitates the maintenance and adjustment.

Stocklin

EDS 10

TECHNICAL DATA

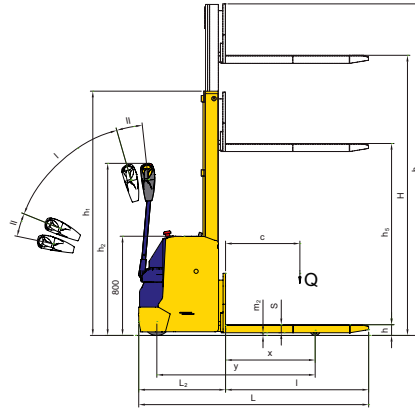

I Travelling area
II Braking area

1.2	Type	EDS 10	
Performance data			
1.5	Load capacity/Fork lifting load	Q[kg]	1000
1.6	Distance to centre of gravity of load	c[mm]	600
5.1	Top speed with/without load	[km/h]	5.5/5.5
5.2	Lifting speed with/without load	[m/s]	0.12/0.2
5.3	Lowering speed with/without load	[m/s]	0.4/0.3
5.8	Max. gradient with/without load	[%]	10.0/10.0

Dimensions			
1.8	Load distance	x [mm]	723
1.9	Wheel base	y [mm]	1278
4.9	Height min./max. steering handle in use	h ₂ [mm]	770/1340
4.15	Forks lowered	h [mm]	90
4.19	Overall length	L [mm]	1855
4.20	Length of front pad	L ₂ [mm]	700
4.21	Overall width	B [mm]	800
4.22	Weight of forks	s/e/l [mm]	65/185/1155
4.25	Distance between outer edge of forks	B ₃ [mm]	565
4.32	Floor clearance in lowered position	m ₂ [mm]	25
4.34	Width pallet service zone 800x1200 VDI3597	Ast [mm]	2117
	safety distance	a/2 [mm]	100
4.35	Turning radius	Wa [mm]	1440

Subject to technical modifications.

Weight (mast A30)			
2.1	Weight of vehicle, with battery	[kg]	880
2.2	Load per axle with front/rear load (1000 kg)	[kg]	730/1150
2.3	Load per axle without front/rear load	[kg]	640/240
Wheels			
3.1	Tyres of all wheels		Vulkollan
3.2	Type of drive/steering handle	Drive wheel	lateral/lateral 1x230/70
3.3	Load rollers		2x83/90
3.4	Support rollers		1x125/50

Drive and control			
6.1	Driving motor AC	[kW]	1.2
6.2	Lifting motor DC	[kW]	2.0
8.1	Driving control Combi lift	[A]	200
5.10	Driving brake		DC current
	Parking brake electro-mech.	[Nm]	11

Battery			
6.3	Type of battery		PPV-DIN PPV-DIN
6.4	Battery voltage, capacity	[V/Ah]	24/160 24/250
	Battery designation		2PZS160 2PZS250

Masts	4.2	4.3	4.4	4.5	
	Typ	Overall height h ₁	Free lift h ₅	Lifting height H	Total height fully extended h ₄
	A24	1670	120	2405	2830
	A28	1870	120	2805	3230
	A30	1970	120	3005	3430
	A34	2170	120	3405	3830
	A38	2370	120	3805	4230
	C39	1845	1415	3936	4375

Stöcklin, or one of our partners in your region will be pleased to advise you.

Stöcklin

Stöcklin Logistics Ltd.
Materials Handling and Storage Systems
CH-4143 Dornach
Tel. +41 (0) 61 705 81 11
Fax +41 (0) 61 705 82 25
E-Mail unit-f@stoeklin.com
www.stoeklin.com

SWISS QUALITY / ISO 9001

